


* 所有原材料, 生产制程, 电镀必须符合 RoHS 要求

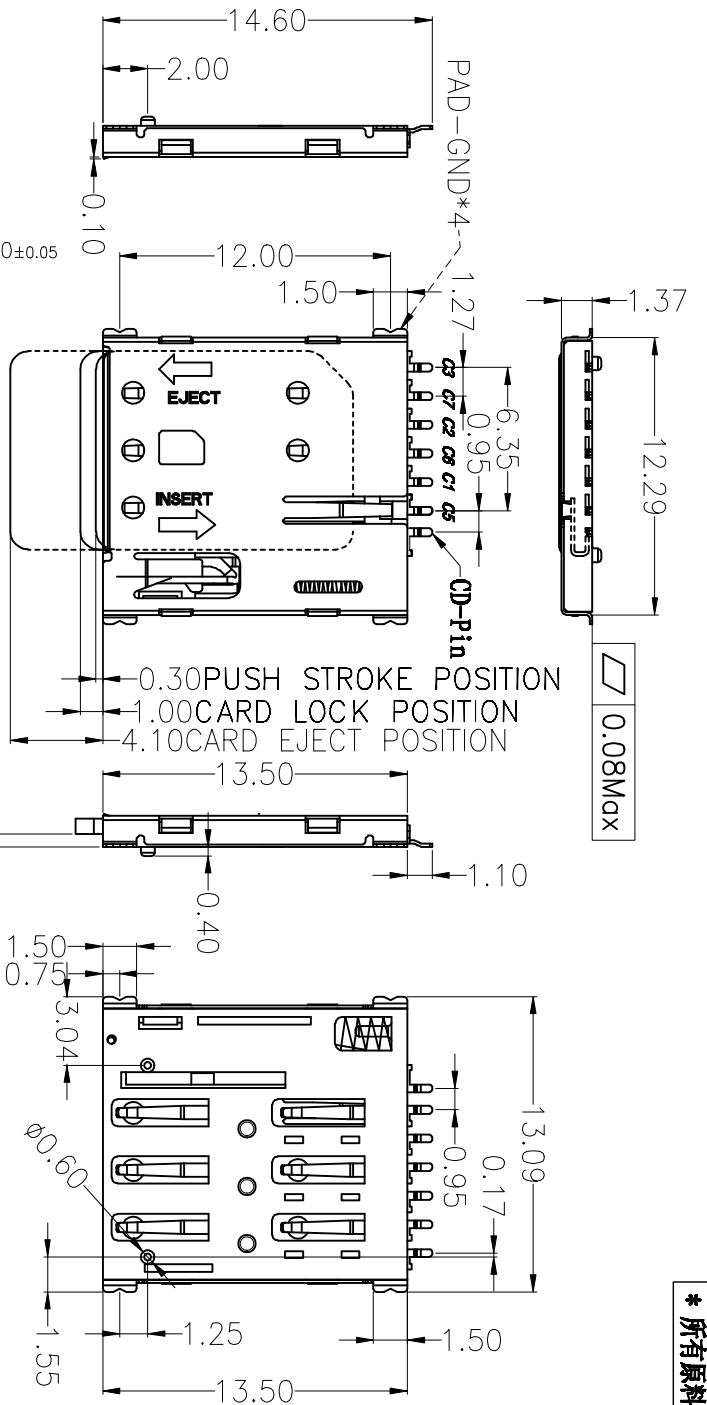

Specification

MATERIAL:
Insulator: High Temperature Thermoplastic, UL 94V-0
Contact: Copper Alloy
SERIAL: S95


PLATING:
Contact: ALL IN GOLD 10
SMT: Plated Cu** IN Overall 120 μm IU

Electrical:
Current Rating : 0.5A AC/DC max.
Voltage Rating : 125V AC/DC
Ambient Temperature Range : -20° C~+60° C
Storage Temperature Range : -40° C~+70° C
Adhesive Hardify Range : 65% R.H. Max.
Contact Resistance: 100mΩ max. Ω
Insulation Resistance: 1000MΩ min. /50%RH
Testing Cycles: 1000~10000 Insertions
产品耐插拔: 2000次

SIM pin assignment	Name
C1	VCC 供电电压
C2	RST 重置
C3	CLK 时钟
C5	GND 接地
C6	VPP 程序电压
C7	I/O 输入输出

CIRCUIT DIAGRAM FOR CARD DETECT SWITCH

CARD DETECT SWITCH (CD)
GND ○
NORMAL.....SHORT
INSERTING CARD.....OPEN

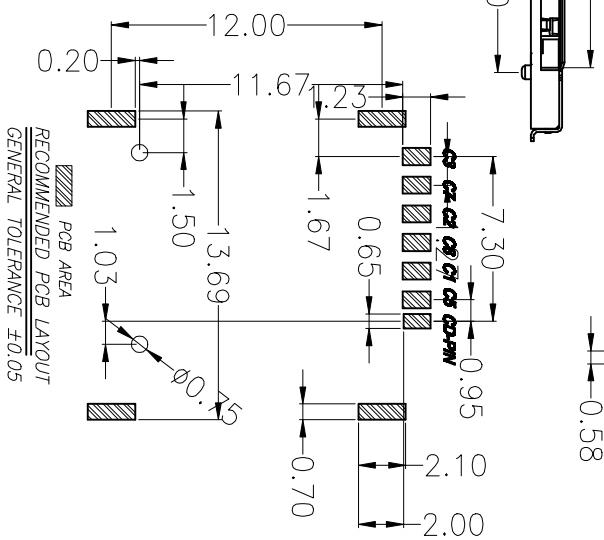

<p>MANUFACTURER: XIN NAN</p> <p>DESIGNER: XIN NAN</p> <p>DATE: 2015/04/10</p> <p>VERSION: 1.0</p>	<p>PROJECT NAME: XIN NAN</p> <p>PROJECT NO.: XNT-01911A1A07A</p> <p>DATE: 2015/04/11</p> <p>DESIGNER: 林心祥</p> <p>DATE: 2015/04/11</p>
<p>SCALE: 1:1</p> <p>UNIT: mm</p> <p>NO. OF SHEETS: 1 of 1</p>	<p>DATE: 2015/04/10</p> <p>DATE: 2015/04/11</p> <p>DATE: 2015/04/11</p> <p>NO. OF SHEETS: 1 of 1</p>